

Housing for CT45 ANPR camera



KEY FEATURES

- ▶ Made from 316 Stainless Steel 76cm high
- ▶ Protective housing for camera and PSU
- ▶ Short-range applications

The bollard is optimised for short to mid-ranged ANPR for the following applications:

- ▶ Airport Access Points
- ▶ Car Park Entrances
- ▶ Barrier control systems

Cameras

The supported CT45 ANPR camera offers a high-quality solution with the bollard for many applications where cameras could be vulnerable to attack. The bollard also blends into the car park environment and puts the camera in the ideal location for barrier control.

Easy maintenance

The bollard housing offers easy camera access through a large lockable panel. The stainless steel housing protects the internal camera against knocks which can cause misalignment.


Technical Information

The CT45 utilises an IR sensitive IP camera. The CT45 is an intelligent camera processing in the camera head transmitting compressed data packets to a server or third party back office.

TagMaster Recognition Engine

The CT45 camera is complemented by the TagMaster recognition engine which is one of the fastest and most accurate in the world. The engine is supported full-time by our in-house development team.

PART NO. INFORMATION	DESCRIPTION
10764, Bollard	Bollard housing for CT45

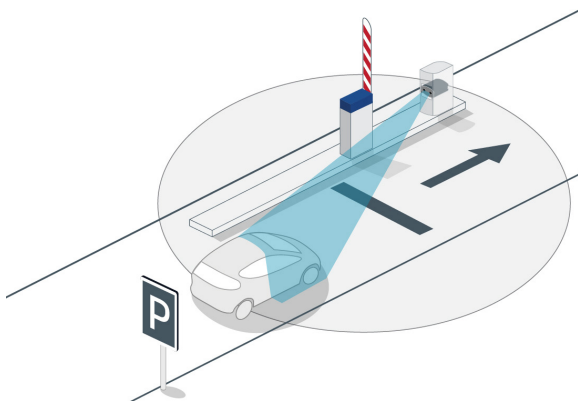

TECHNICAL INFORMATION

ANPR Range Options	:	Typically 3m to 10m range with the CT45 for short range
ANPR Camera	:	Can support CT45 with integral overview
Housing	:	316 Stainless Steel
Illuminators	:	See CT45 datasheet
Environmental	:	Housing is shipped with a base for easy installation and ease of set up
Dimensions and Mass	:	760 mm x 268 mm x 330 mm (H x W x D)
Weight	:	18 kg

Due to TagMaster's continuous effort to develop the products in response to customer needs, the above specifications are subject to change.